




# SP-4616

## Cantilever Scope Mount Ø34 H38mm/1.5" 6MIL PIC

Picatinny mount for use on AR10 rifles

Rings: 34 mm  
Tilt: 6 MIL/20.6 MOA  
Height: 38 mm/1.5"  
Length: 150 mm/5.9"  
Weight: 252 g/8.9 oz  
Interfaces: 8 sets  
EAN: 7340150700331

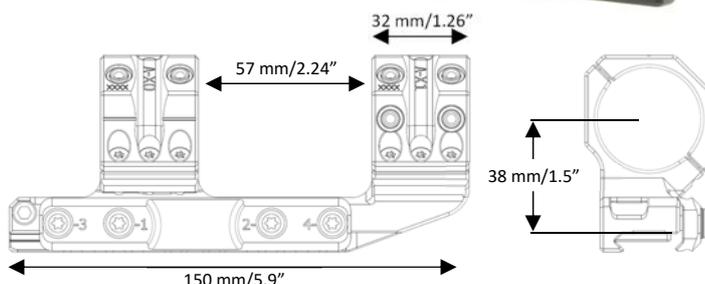

The **IDEAL SCOPE MOUNT SYSTEM** series of mounts feature **seven set of interfaces to attach any of more than 40 different accessories**, and has a bubble level integrated in the rear plane of the mount body to prevent canting of the rifle. The rings are diagonally cut for increased visibility of the elevation and windage turrets (US Patent 8,733,011).

The mounts are machined from billet 7075 T651 aluminum and all aluminum parts are hardcoat anodized. The Torx 20 ring and clamping screws are zinc-nickel coated for corrosion resistance. The screws come pre-waxed from the factory to ensure proper torque values.

The mount is shipped with a manual and a "wedge" leveling key.

### NOTE:

The SP-4616 is designed for use on long-range AR10-style rifles with MIL-STD-1913 or STANAG 4694 rails, and has an absolute co-witness with back-up iron sights. The SP-4616 will fit most 34 mm scope tubes except for scopes with extended erector housings, such as the US Optics TPAL/EREK and Nightforce BEAST.

CONTACT

Spuhr i Dalby AB

Phone: +46 46 712 012

Web: [www.spuhr.com](http://www.spuhr.com)

Address: Terminalvägen 19  
SE-246 42 Löddeköpinge  
Sweden